

# ***RX45 & RX55 Scissor Lifts***

***Maximum productivity, minimum space***

**UPDATED**




# RX45 & RX55 Scissor Lifts


Large capacity with a small footprint

EXCLUSIVE

Best-in-class drive-on height

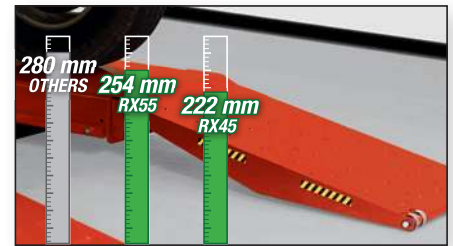

✓ Minimize clearance issues

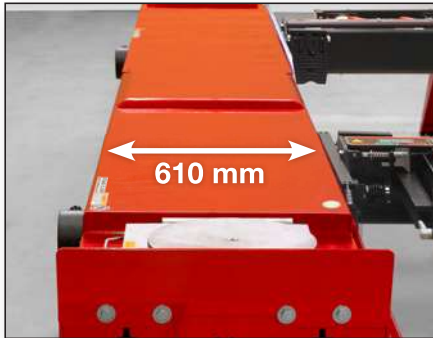

STANDARD

## Wide runways

✓ 610 mm (24 in.) runways accept wide vehicles

OPTIONAL


## Stainless steel turnplates



- ✓ Maximum corrosion resistance for long life
- ✓ Optional PowerSlide® turnplates (shown) lock/unlock automatically

STANDARD

## Integrated air line

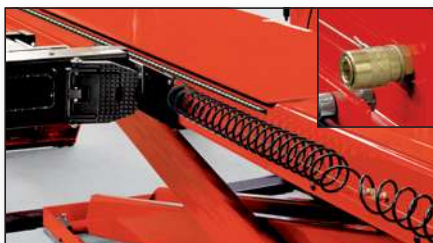

- ✓ Convenient air source for tools at front and rear

PATENTED

## Sensor feedback system\*



- ✓ Sensors keep runway level
- ✓ Safely stops if obstructed

STANDARD

## Velocity safety fuses




- ✓ Instantaneous shutdown in event of hydraulic failure

\* Shown with protective cover removed

**OPTIONAL**


**Two Swing Air Jacks**

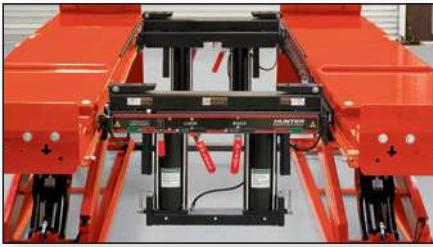

- ✓ 2720-kg (6000-lb.) capacity
- ✓ Technicians' favorite

**EXCLUSIVE**

**Louvered ramps**

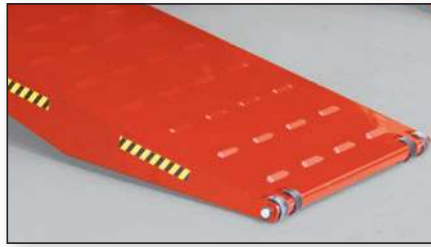

- ✓ Prevent wheel spin in wet conditions
- ✓ More effective than diamond tread or abrasive strips

**PATENTED**

**Control panel**



- ✓ Complete operation from the console
- ✓ Optional PowerSlide® Inflation Station and FIA control



*RX45KLIS-435E shown with optional light kit, Swing Air Jacks, and front tumpates*

**STANDARD**

**Safety locks**



- ✓ Precision-fit teeth lock runways at 16 level height positions

**EXCLUSIVE**

**Movable work steps**



- ✓ 10 secure positions
- ✓ Lightweight design

**PATENTED**

**OPTIONAL**

**Inflation Station**



- ✓ Automatically fills or bleeds each tire
- ✓ No dangling air lines

# Exclusive features, enhanced capabilities

EXCLUSIVE

## Fast descent speed

- ✓ 50% faster lowering times
- ✓ Ensures a soft landing by automatically slowing the last several inches

FAST  
Descent

0:25

0:50

Others



OPTIONAL

## Swing Air Jacks

- ✓ Lift vehicles off the runways during alignment procedures and other multi-service operations
- ✓ 2720-kg (6,000-lb.) capacity
- ✓ Folding design provides lowest-profile

133-85-1 — 2720-kg (6000-lb.) Capacity Swing Air Jack

EXCLUSIVE    OPTIONAL

## Flush-mount installation

- ✓ Accommodate lowered vehicles or expensive spoilers
- ✓ Ideal for “showcase” shops
- ✓ Drive-thru capability

Add **F** to any RX45K or RX55K model number



EXCLUSIVE **OPTIONAL**

## AlignLights system

- ✓ Bright and efficient LED light source underneath the vehicle
- ✓ Automatically turns on when the lift is raised and turns off when the lift is lowered to the floor
- ✓ AlignLights is an ALI-listed accessory

20-3438-1 — *AlignLights system*



## Standard equipment

- ✓ Flush-mounted, full-floating slipplates (PowerSlide® slipplates on PS and IS models)
- ✓ Two movable work steps (not included with flush-mount installations)
- ✓ Louvered ramps with built-in wheel stops
- ✓ Front wheel stops
- ✓ Two wheel chocks
- ✓ Built-in, full-length jack rails
- ✓ Built-in air line kit

**OPTIONAL**

## Extension kits

### Approach ramp extensions




#### **305 mm (12 in.) kit – 20-3112-1**

Standard with RX55K

#### **432 mm (17 in.) kit – 20-3113-1**

Adds approximately 127 mm (5 in.) to RX55K when substituted for 20-3112-1




#### **1016 mm (40 in.) kit\* – 20-2169-1**

Adds approximately 711 mm (28 in.) to RX55K

#### **1270 mm (50 in.) kit\* – 20-2189-1**

Adds approximately 965 mm (38 in.) to RX63K

### Drive-thru conversion kits\*

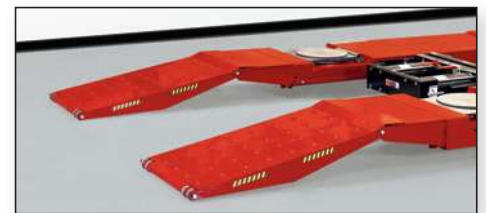

#### **52 in. kit – 20-2498-1**

For camera sensors

#### **63 in. kit – 20-2501-1**

For conventional sensors

\* Quick-release pins included.

# Hunter offers two fully integrated options to enhance productivity



## **FIA** Fully Integrated Alignment

FIA allows WinAlign® aligners to control the lift features for ultimate productivity. Two patented designs offer greater flexibility and time-saving capabilities.



*Shown with optional aligner console, sensors, Swing Air Jacks, front turnplates, target support brackets, and lights*




PATENTED

### PowerSlide® edition


- ✓ Locks slipplates and turnplates with the touch of a button or automatically through an FIA-equipped aligner\*
- ✓ No more struggles with lock pins
- ✓ Avoid wear and tear and extend the life of your turnplates



OPTIONAL

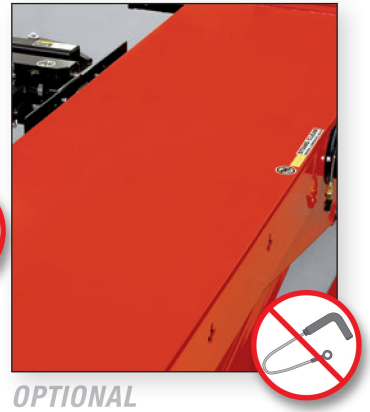


OPTIONAL

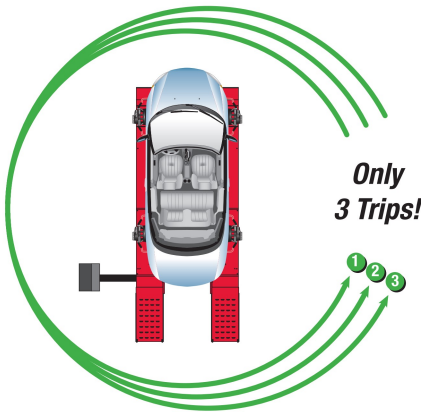

### Minimize trips around the car

- 1 Mount targets
- 2 Make adjustments
- 3 Remove targets
- 4 Jack vehicle and compensate sensors
- 5 Lower leveling legs (if equipped)
- 6 Remove slipplate and turnplate pins
- 7 Replace slipplate and turnplate pins
- 8 Raise leveling legs (if equipped)


### Yesterday's Technology

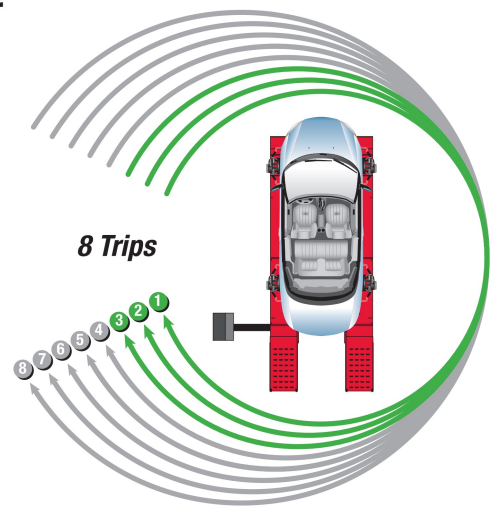

PATENTED

### Inflation Station edition

- ✓ Includes PowerSlide® slipplates and turnplates
- ✓ Automatically inflate all four tires simultaneously
- ✓ Record starting and final pressure\*
- ✓ Hose recoils to keep work area clear

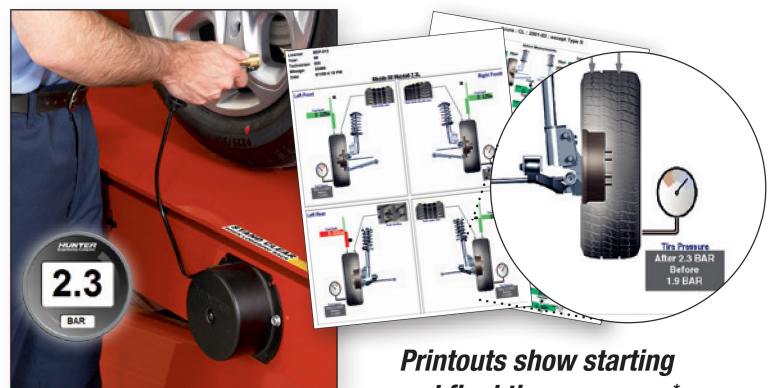

\* Requires FIA equipped aligner with WinAlign® 10.x software or greater

# Specifications

	RX55K	RX45KL	RX45K
<b>Max. vehicle weight</b>	5500 kg (12125 lbs.)	4536 kg (10000 lbs.)	4536 kg (10000 lbs.)
<b>Max. wheelbase</b>	<b>surface/flush</b>		
General service	4673/4572 mm (184/180 in.)	4673/4572 mm (184/180 in.)	4343/4241 mm (171/167 in.)
Two-wheel alignment	4547/4445 mm (179/175 in.)	4547/4445 mm (179/175 in.)	4216/4115 mm (166/162 in.)
Four-wheel alignment	4013 mm (158 in.)	4013 mm (158 in.)	4013 mm (158 in.)
<b>Min. four-wheel alignment</b>	2235 mm (88 in.)	2235 mm (88 in.)	2235 mm (88 in.)
<b>Lowered height</b>	254 mm (10 in.)	222 mm (8.75 in.)	222 mm (8.75 in.)
<b>Max. lifting height</b>	1803 mm (71 in.)	1829 mm (72 in.)	1829 mm (72 in.)
<b>Alignment height</b>	All lock positions		
<b>Runway width</b>	610 mm (24 in.)		
<b>Tread width</b>			
Min. inside	1016 mm (40 in.)		
Max. outside	2235 mm (88 in.)		
<b>Air pressure</b>	6.2-10.3 bar (90-150 psi)*		
<b>Speed</b>	55 seconds (raise), 25 seconds (descent)		

\* 8.6 bar (125 psi) required for full jack capacity

## Models

	RX55KIS RX45KIS	RX55KPS RX45KPS	RX55K RX45K
Fully Integrated Alignment	✓	✓	
Inflation Station	✓		
PowerSlide® slippates	✓	✓	
Flush-mount	Add <b>F</b> to any RX model number (ex. RX45KF)		
Long-deck (RX45K models only)	Add <b>L</b> to any RX45 model number (ex. RX45KLIS)		


Because of continuing technological advances, specifications, models and options are subject to change without notice.

PowerSlide and WinAlign are registered trademarks of Hunter Engineering Company. The PowerSlide logo is a trademark of Hunter Engineering Company.

0418AH

Copyright © 2018, Hunter Engineering Company

## RX45K Plan View

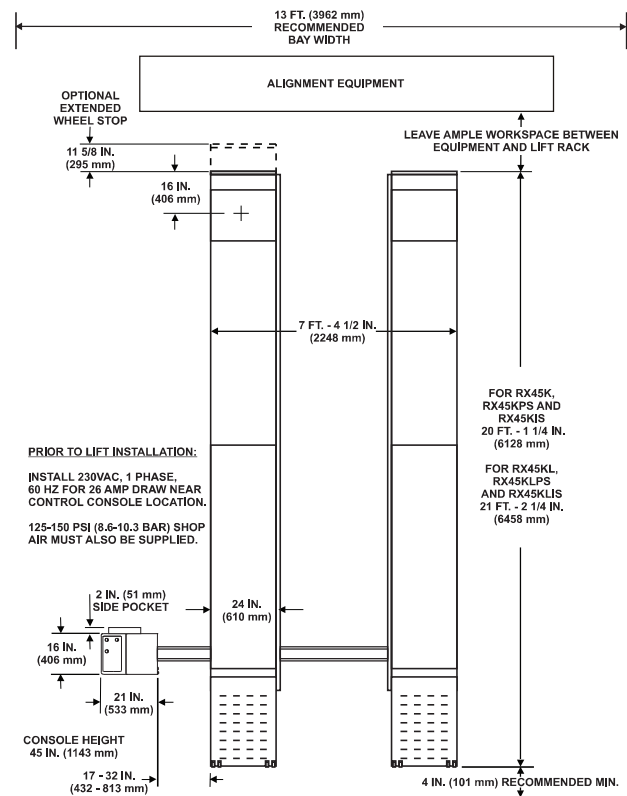

See your Hunter Sales Representative for details on site requirement.

Add one of the following suffixes to the desired model number listed to the left (ex. RX55K-435E):

Suffix	Power configuration
-215E	208/230V, 1PH, 50Hz
-216E	208/230V, 1PH, 60Hz
-435E	208/230/400/460V, 3PH, 50Hz

# HUNTER

Engineering Company

[www.hunter.com](http://www.hunter.com)

11250 Hunter Drive, Bridgeton, MO 63044, USA  
Tel: +1-314-731-3020, Fax: +1-314-731-0132  
Email: [international@hunter.com](mailto:international@hunter.com)

Form 7472-TE-05, 04/18